

GRIVEL®



EN 893:2019




UIAA


GX LT
GX LT HYBRID

Grivel s.r.l.
Località Champagne 5
11020 Verrayes (AO) Italy
Phone: +39.0166.546287
info@grivel.com
www.grivel.com

A1 - Binding compatibility

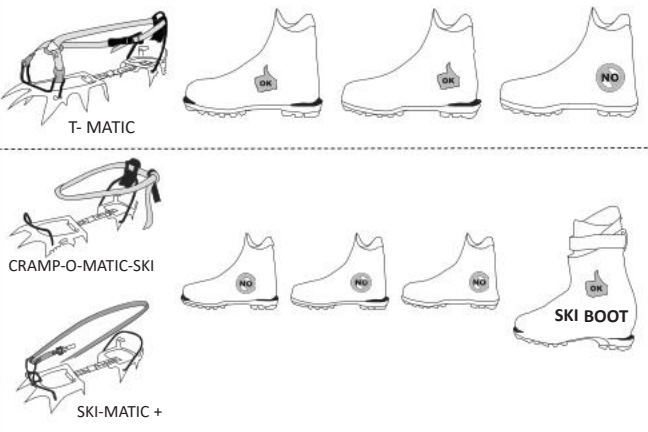

A2 - Binding size

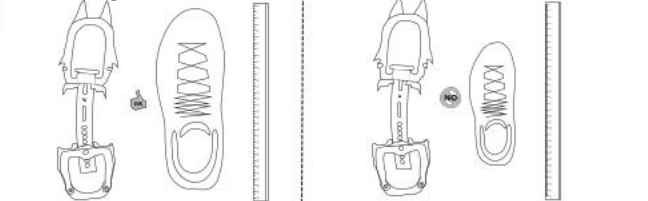

GX Binding System

Model	T-Matic	Cramp-O-Matic	Ski-Matic+	Material	Size (EU)
RAGXLT. TME	✓	—	—	Steel	36-47
RAGXHLT. TMCS	✓	✓	—	Steel (front) Light Alloy	35-46
RAGXHLT. SM+E	—	—	✓	Steel (front) Light Alloy	35-46


B2 - Shortening of Bi-Fold Bar (16 cm)

BI-FOLD BAR RBBRS.BIF.16 (16 cm)

Other compatible accessories:

BI-FOLD LONG BAR RBBRS.BIF.19 (19 cm)


BI-FOLD BAR RBBRS.BIF.22 (22 cm)

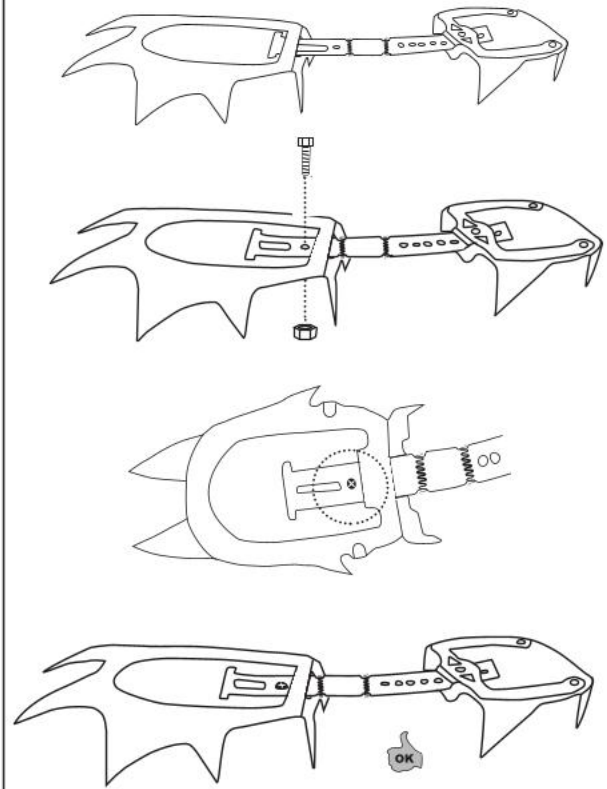




B3 - Crampon folding with Bi-Fold Bar




B1 - Adjustment

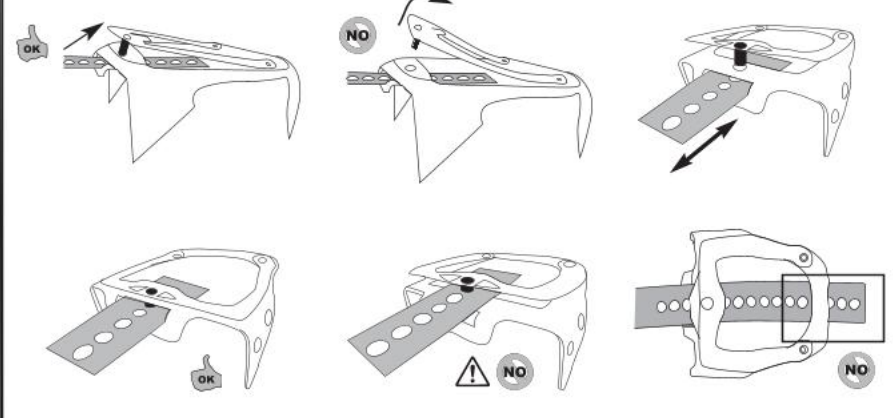


C1 - Front Adjustment

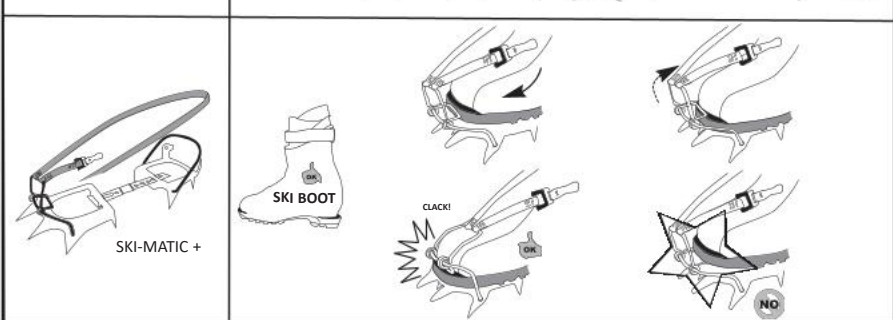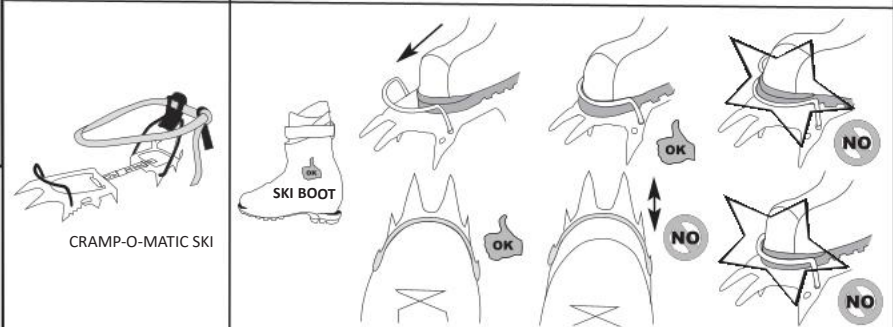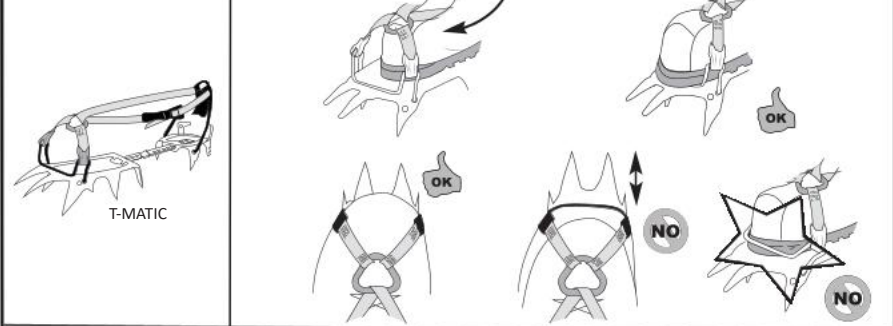

C2 - Tip Adjustment

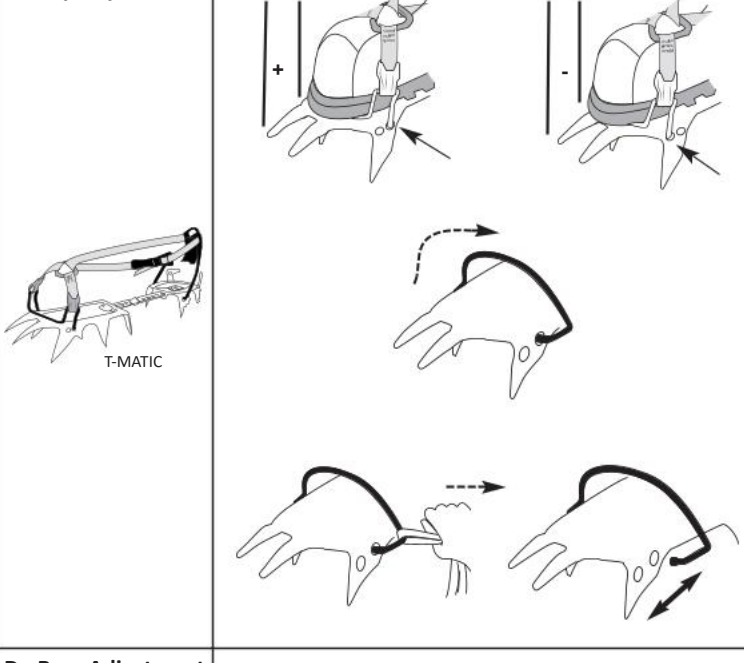

C3 - Tip Adjustment

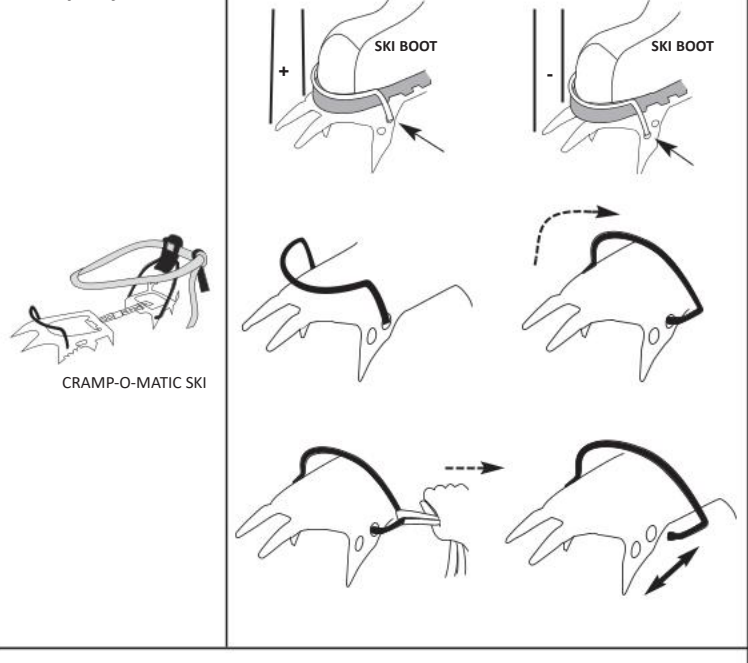

D - Rear Adjustment

